
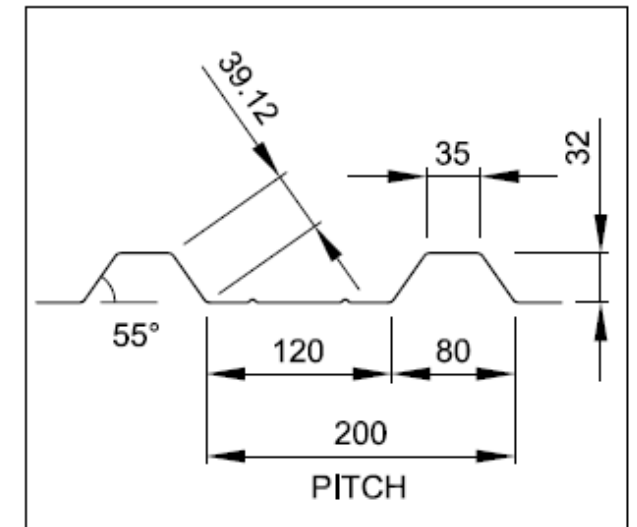


1000-32 Forward

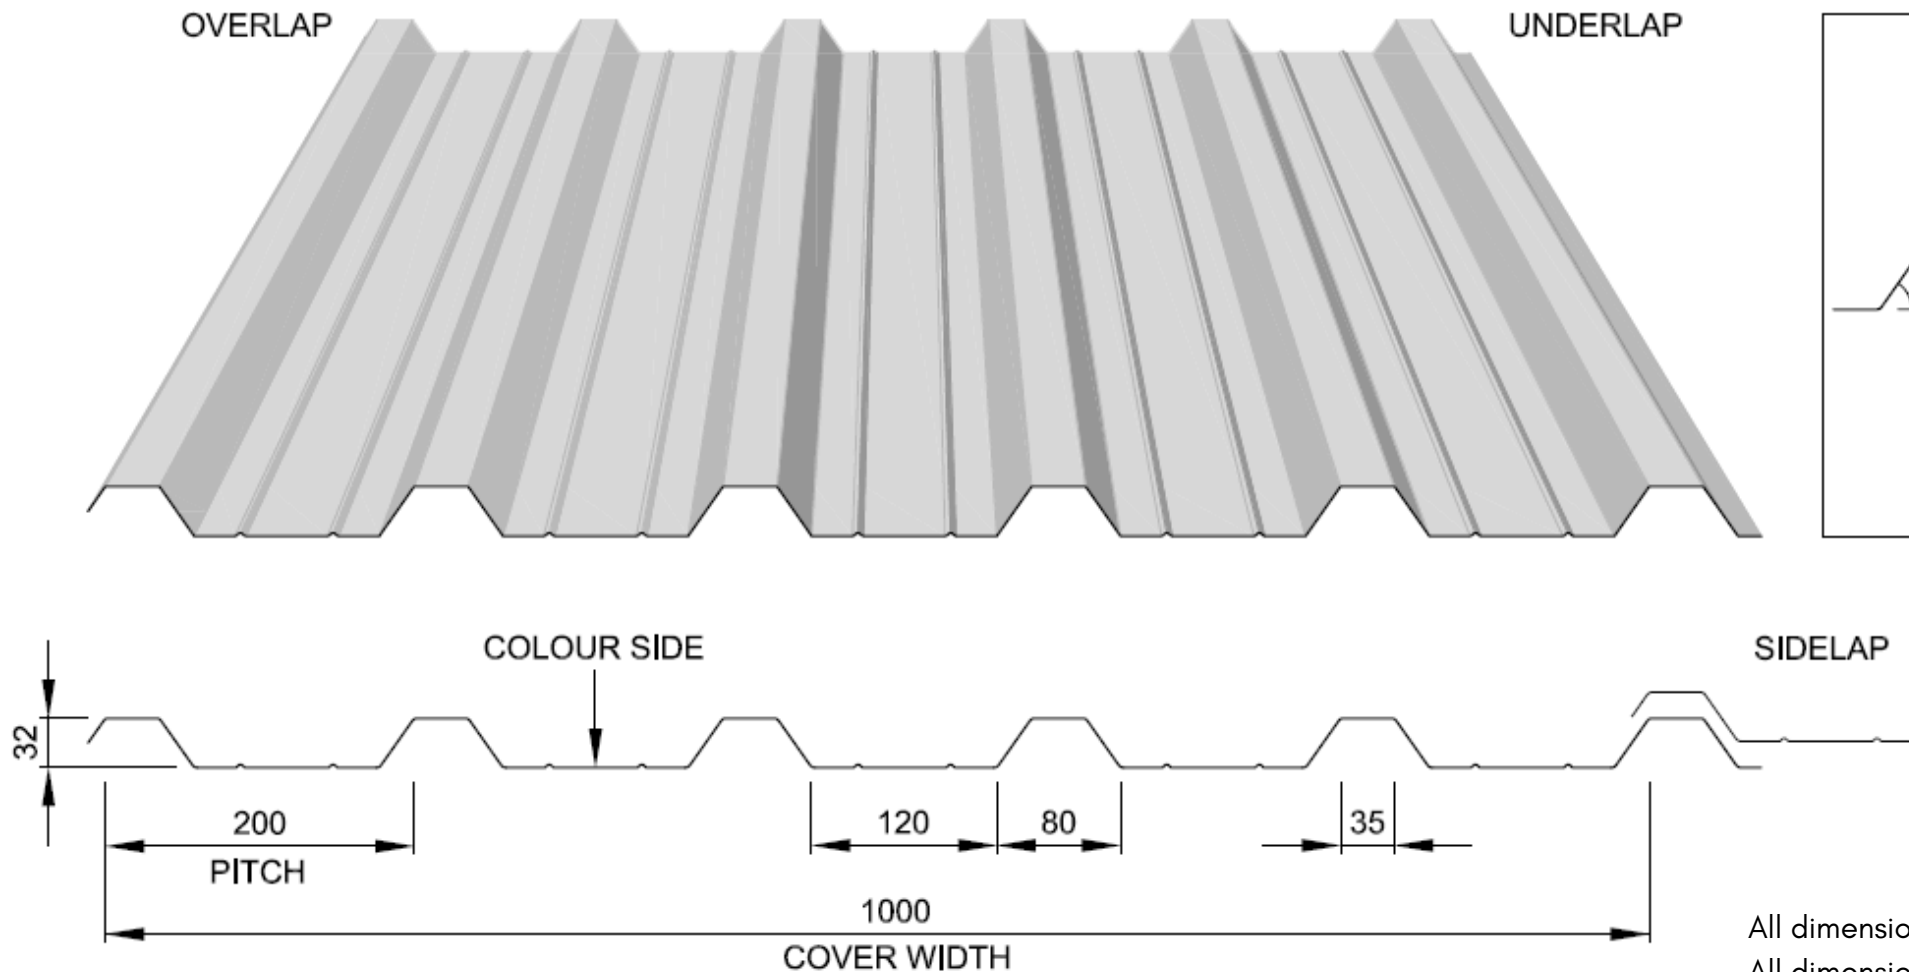

All dimensions measured to intersection points
All dimensions subject to manufacturing tolerances

Factored Imposed Loads (kN/m ²)																(Positive +ve)	
Thickness (mm)	Weight (kg/m ²)	Span Condition	Span (m)														
			1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40
0.50	4.90	Single	3.47	2.85	2.38	2.02	1.73	1.50	1.23	1.02	0.86	0.72	0.62	0.53	-	-	-
		Double	2.27	1.96	1.71	1.50	1.34	1.19	1.07	0.97	0.88	0.81	0.74	0.68	0.63	0.58	0.54
		Multi	2.70	2.33	2.04	1.80	1.60	1.43	1.29	1.17	1.07	0.98	0.90	0.83	0.76	0.67	0.59
0.70	6.41	Single	6.00	4.92	4.11	3.48	2.82	2.28	1.87	1.55	1.30	1.10	0.94	0.81	0.71	0.62	0.54
		Double	3.83	3.29	2.86	2.51	2.22	1.98	1.77	1.60	1.45	1.32	1.21	1.11	1.03	0.95	0.88
		Multi	4.57	3.94	3.43	3.02	2.67	2.39	2.14	1.94	1.76	1.61	1.47	1.35	1.18	1.03	0.90